


8 7 6 5 4 3 2 1

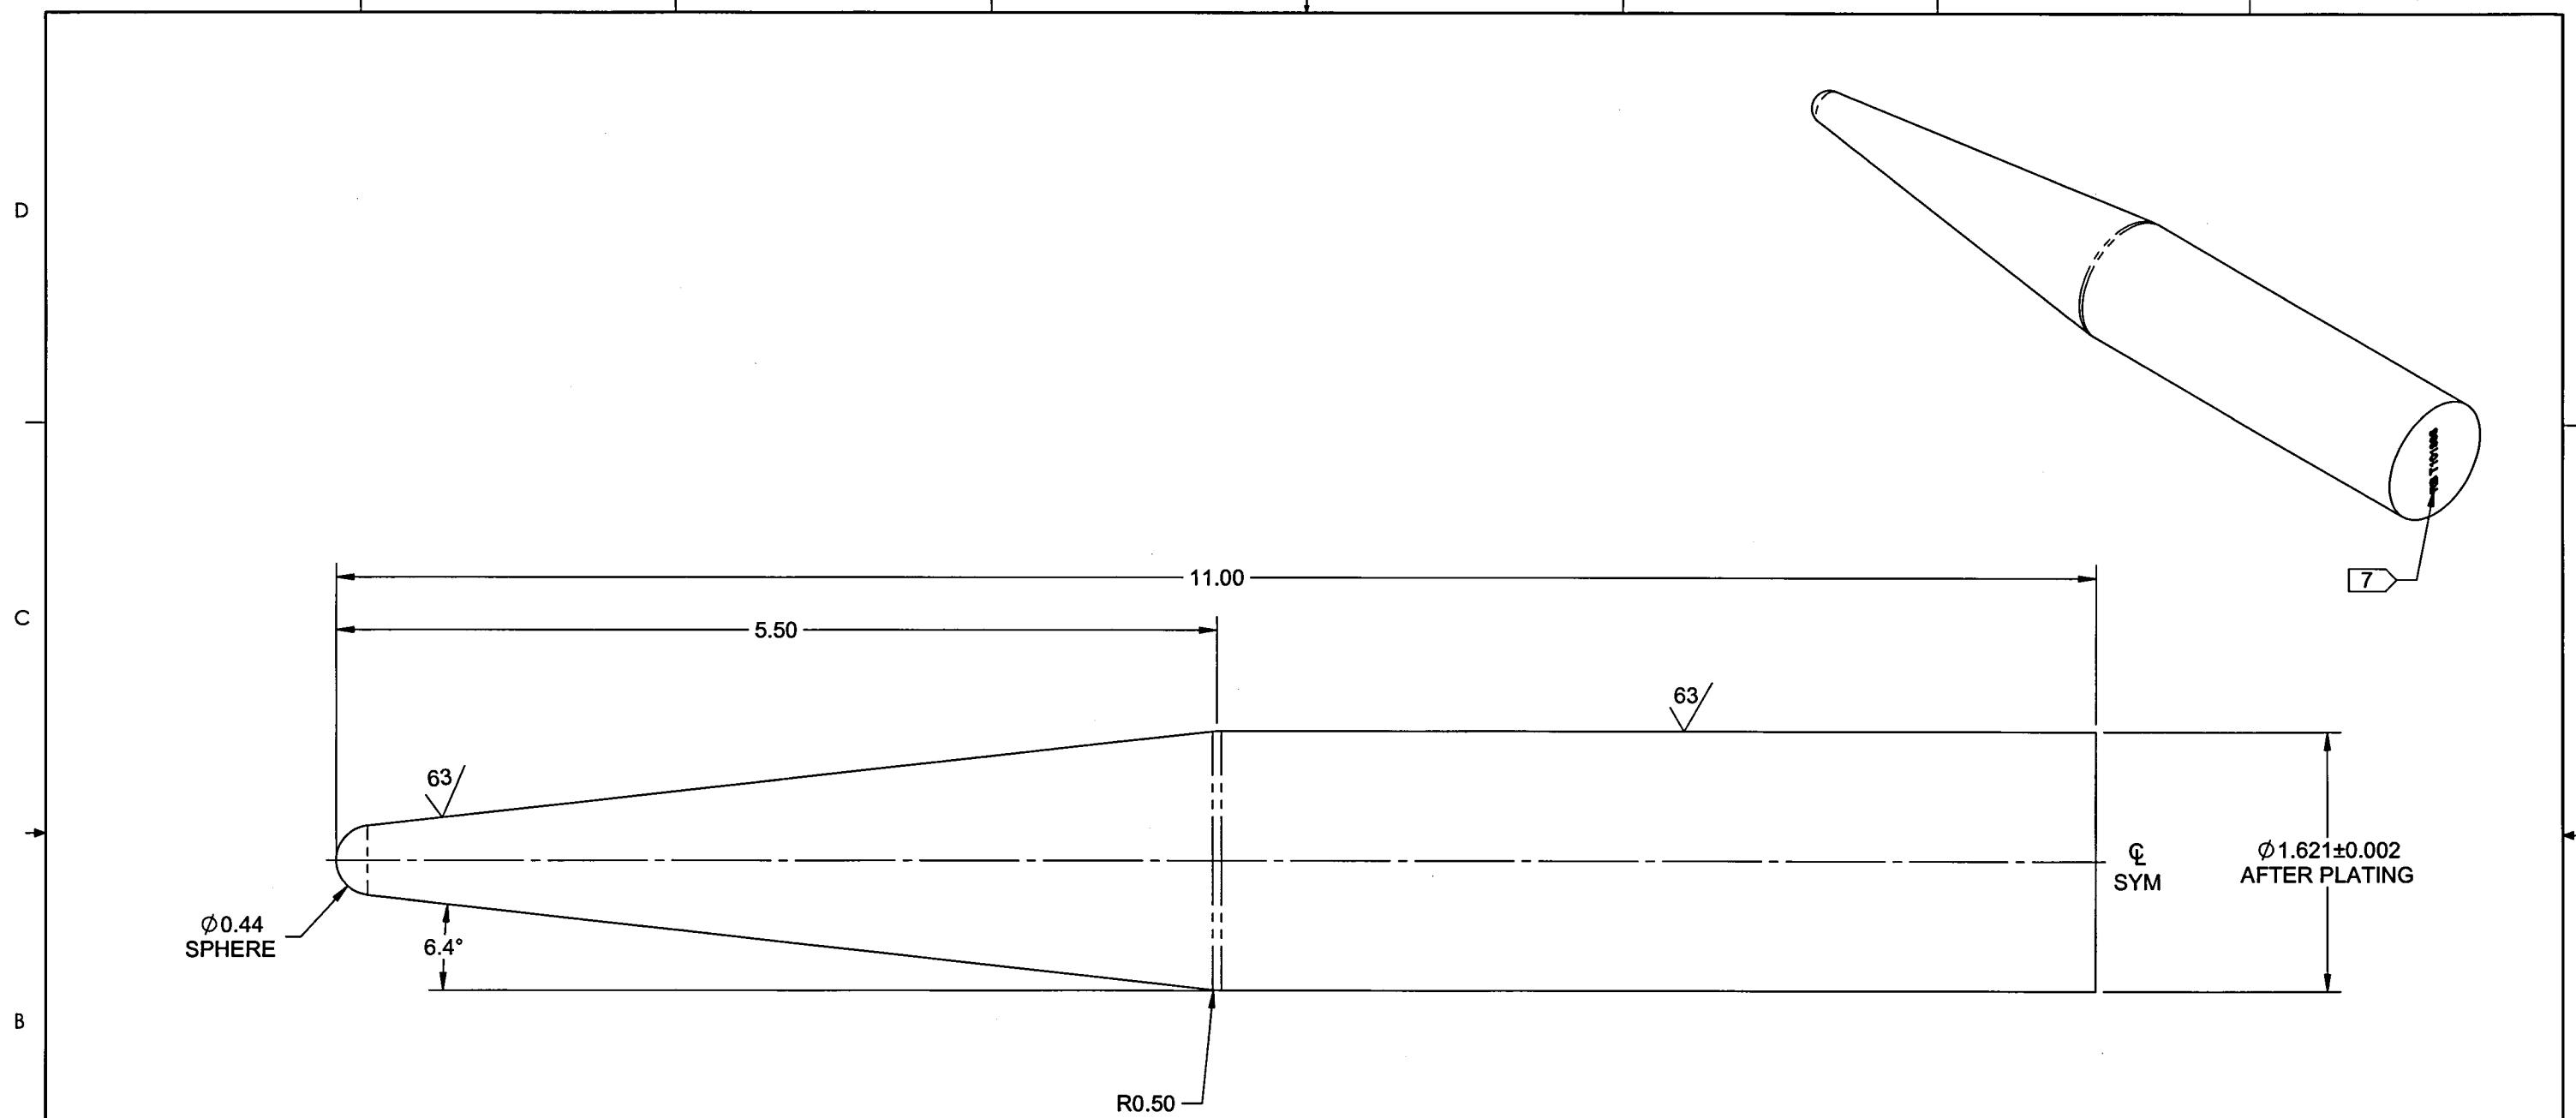

RB T101995 STRAP PIN DRIFT

NOTES:

- 1) MATERIAL: 4140/4142 (28-32 RC)
- 2) HEAT TREAT: N/A
- 3) FINISH: ZINC PLATE (YELLOW OR BLACK) PER ASTM B633 TYPE 2 CLASS 2
- 4) TOLERANCES: X.X = +/- 0.1" / +/- 1°
 $X.XX = +/- 0.01" / +/- 0.5°$
 $X.XXX = +/- 0.005" / +/- 0.1°$
 $X.XXXX = +/- 0.0005" / +/- 0.05°$
 PARALLELISM, ECCENTRICITY AND SYMMETRY ABOUT ALL CENTER LINES = +/-0.005"
- 5) UNITS: INCHES UNLESS OTHERWISE NOTED
- 6) BREAK SHARP EDGES: 0.005" TO 0.010"
- 7) IDENTIFICATION: MACHINE ENGRAVE PER CAD MODEL AS SHOWN OR DOT MARK T/N AS SHOWN

A	NEW ISSUE	18-761	VM
REV.	DESCRIPTION	ECN #	BY
DESIGN	VM	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	VM		
CHECKED	VM	TOOL PART #	REV. A
MFG. APPR.	DP	RB T101995	SHEET 1 OF 1
APPROVED	<i>T.B.Lee</i>	TITLE	SCALE
		STRAP PIN DRIFT	NTS
	DATE 7/4/2018	COPYRIGHT © 2018 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1